

DOUBLE PILE MOUNTING SYSTEM FIELD APPLICATIONS


M-FST-232P



FEATURES	
<i>Application</i>	Field Applications – To any ground and slope
<i>Materials</i>	Substructure, Piles & PV Rails from galvanized steel [EN 1461, EN 10346]
<i>Accessories</i>	Aluminium, Galvanized or Stainless Steel
<i>Inclination</i>	20° , 25° , 30° or according to the customer's request
<i>Orientation</i>	Portrait
<i>Dimension's Limits</i>	Unlimited extension of table length/ Usually up to 40m in length
<i>PV Modules</i>	Up to 2.5m in length/ Special Design for bifacial panels/Ability for further PV equipment on the main structure
<i>Foundation</i>	Pile ramming/ Piles and holes filled with concrete/ Piles and concrete blocks
<i>Wind Load Limit</i>	33 m/s (Terrain Category I)
<i>Snow load Limit</i>	1,7 kN/m ² (Zone C)
<i>Slope Limits</i>	Up to ± 15% E-W and up to -5% S-N for normal design/ Up to ± 35% E-W and up to ± 25% S-N for special design. The slopes are smooth and each structure is considered to have steady slopes.
<i>Height Differential Absorption</i>	Reconstruction - Add piece 30cm length

DOUBLE PILE MOUNTING SYSTEM FIELD APPLICATIONS


M-FST-232P

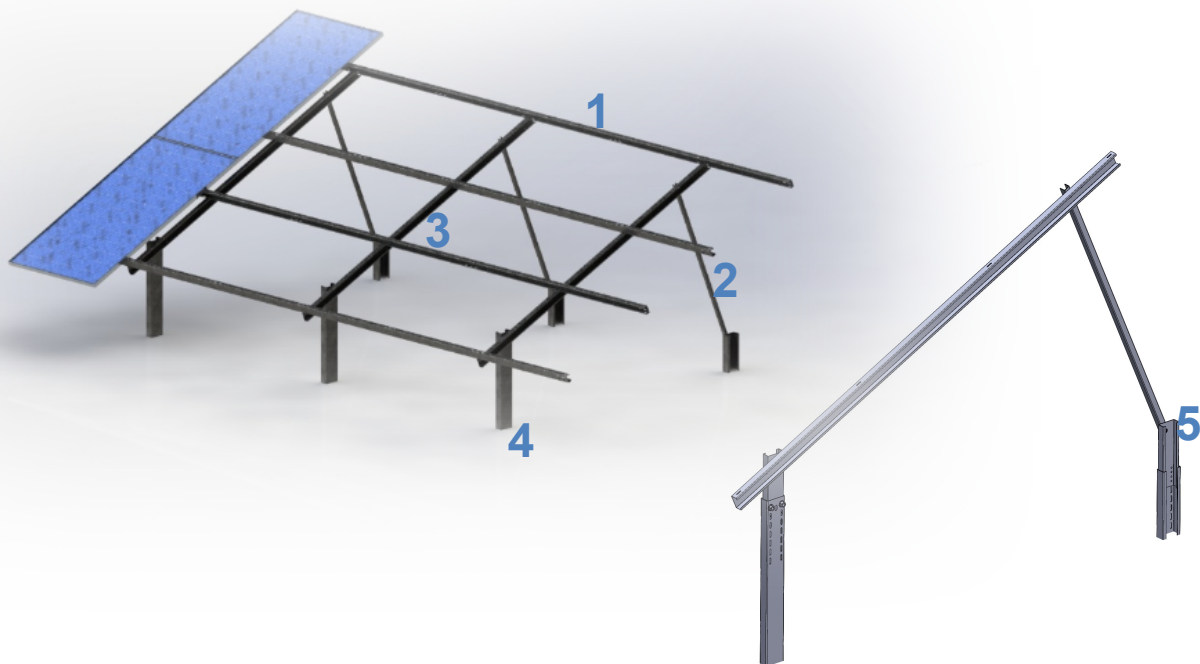


COMPONENTS




1. PV RAIL




2. REAR LEG



3. INCLINED BEAM



4. PILE



5. HEIGHT ADJUSTER

